


2/2-MAGNETVENTILE DIREKT BETÄTIGT ODER VORGESTEUERT

Produktverzeichnis

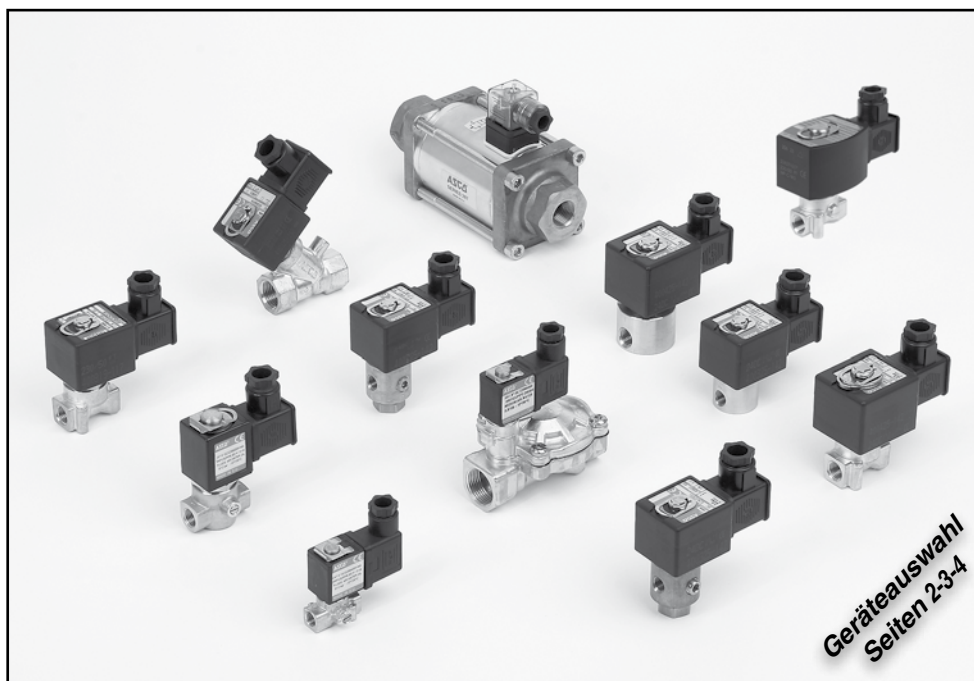

C

Funktion	Δ P		Temperatur		Ø Anschluss	Baureihe	Seite
	min. (bar)	max. (bar)	min. (°C)	max. (°C)			
GEHÄUSE AUS MESSING							
NC-NO	0	130	-20	+90	1/8	262	V205
NC-NO	0	28	-10	+100	1/8 - 1/4	256	V209
NC-NO	0	140	-25	+80	1/8-1/4	262	V223
NC-NO	0	100	-20	+90	1/4	262	V225
NC-NO	0	40	-25	+80	1/4	272	V238
NC-NO	0	34	-25	+80	3/8	263	V253
NC	0	20	-20	+90	3/8	263	V255
NC-NO	0	1	-20	+90	3/8 .. 3/4	030	V270
NC-NO	0	40	-20	+100	Coaxial-Version 3/8 .. 1	287	V272
NC	0	20	-10	+100	Mehrfachgrundplatten 1/8	256	V297
NC	0	40	-25	+80	Aufflanschbar (1/4-1/2)	272	V298
NC	0	10	-20	+85	3/8 .. 1	238	V311
NC-NO	0	9	-20	+85	3/8 .. 1 1/2	210	V313
NC	0,3	16	-10	+85	3/8 .. 2	238	V316
NC-NO	0,35	20	-20	+85	3/8 .. 2	210	V340
NC	0,07	24	-20	+90	3/8 .. 2	210	V345
NC	0,7	100	-20	+90	1/4 .. 3/4	223	V353
GEHÄUSE AUS EDELSTAHL							
NC-NO	0	7	0	+60	M5 / aufflanschbar	065	V203
NC-NO	0	130	-20	+90	1/8	262	V205
NC-NO	0	28	-10	+100	1/8 - 1/4	256	V209
NC-NO	0	152	-25	+120	1/8-1/4	262	V223
NC-NO	0	150	-20	+90	1/4	262	V235
NC-NO	0	40	-25	+80	1/4	272	V238
NC-NO	0	34	-25	+80	3/8	263	V253
NC	0	6,5	-20	+90	3/8	263	V255
NC-NO	0	40	-20	+100	Coaxial-Version 3/8 .. 1	287	V272
NC-NO	0	9	-20	+85	3/8 .. 1 1/2	210	V313
NC	0,07	9	-20	+90	3/8 - 1/2	210	V345
NC	1,8	100	-20	+90	1/2 - 3/4	223	V353
GEHÄUSE AUS ALUMINIUM							
NC-NO	0	9	-20	+85	3/8 .. 3	215	V385
GEHÄUSE AUS KUNSTSTOFF							
NC	0	10	-25	+40	CNOMO, Größe 15 Aufflanschbar (M5/Steckanschluss)	302	V292
NC	0	16	-10	+80	Aufflanschbar (M5)	108	V295

(Explosionsfähige Atmosphären: siehe Seiten 5 und 6)

Seite		Baureihe		Magnetleistung (W)		Magnete (siehe Magnetventile für explosionsfähige Atmosphären)		Gruppe II											
								Stäube					Gas / Stäube						
								Zone 22					Zone 2 - 22		Zone 1 - 21			Zone 0 - 20	
						3 D		3 GD EEx nA		2 G Ex d 2 D Ex tD			2 G Ex e mb 2 D Ex tD		2 G Ex mb 2 D Ex mbD		1 G Ex ia 1 D Ex iaD		
						V1067-1		V1063 (II T4-T3 IP65)		V1010-1			V1047 (II T6..T3 IP67)		V1035 (II T6..T3 IP67)		V1056 (IICT6..T4)		
						DU (CM 22 - C 22A)		ZNPZNPWSZN (NM6)		NF (MXX)			EM (M6)		PV (EM5)		302		
						DU (CM 25 - C 25A)		ZNPZNPWSZN (NMXX)		NF (M12)			EM (MXX)		PV (EMXX)				
						SCDU (XM5)		ZNPZNPWSZN (NM12)		WSNF (MXX)			EM (M12)						
						SCDU (M6)		302 nA		WSNF (M12)			WSEM (M6)						
						SCDU (MXX)		ZNPZNPWSZN (NM12)		NK (MXX)			WSEM (MXX)						
						SCDU (M12)							WSEM (M12)						
						WPDU (XM5)													
						WPDU (M6)													
						WPDU (MXX)													
						WPDU (M12)													
						WSDU (XM5)													
						WSDU (M6)													
						WSDU (MXX)													
						WSDU (M12)													
V205	262	6	9,7																
		9	-																
		-	15,3																
V209	256	4	5,5																
		3,5	7																
V223	262	8,1	-																
		-	10,6																
		10,1	-																
		-	11,6																
		17,1	-																
V225	262	6	9,7																
		9	-																
		-	15,3																
		10,5	11,2																
		16,7	-																
		-	19,7																
V235	262	6	9,7																
		9	-																
		-	15,3																
		10,5	11,2																
		16,7	-																
		-	19,7																
V238	272	10,5	11,2																
V253	263	8,1	-																
		-	10,6																
		10,1	-																
		-	11,6																
		17,1	-																
V255	263	6	9,7																
		9	-																
		-	15,3																
		10,5	11,2																
		16,7	-																
		-	19,7																
V270	030	6	9,7																
		10,5	11,2																
		16,7	-																
		15,4	16,8																
		20	-																
V292	302	-	-																
V295	108	2,5	3																
V298	272	10,5	11,2																
V311	238	6	-																
		9	-																
		-	15,3																

(1) Auf Anfrage.



