


# ELECTROVANNES 3/2

## A COMMANDE DIRECTE ET ASSISTEE

Sommaire

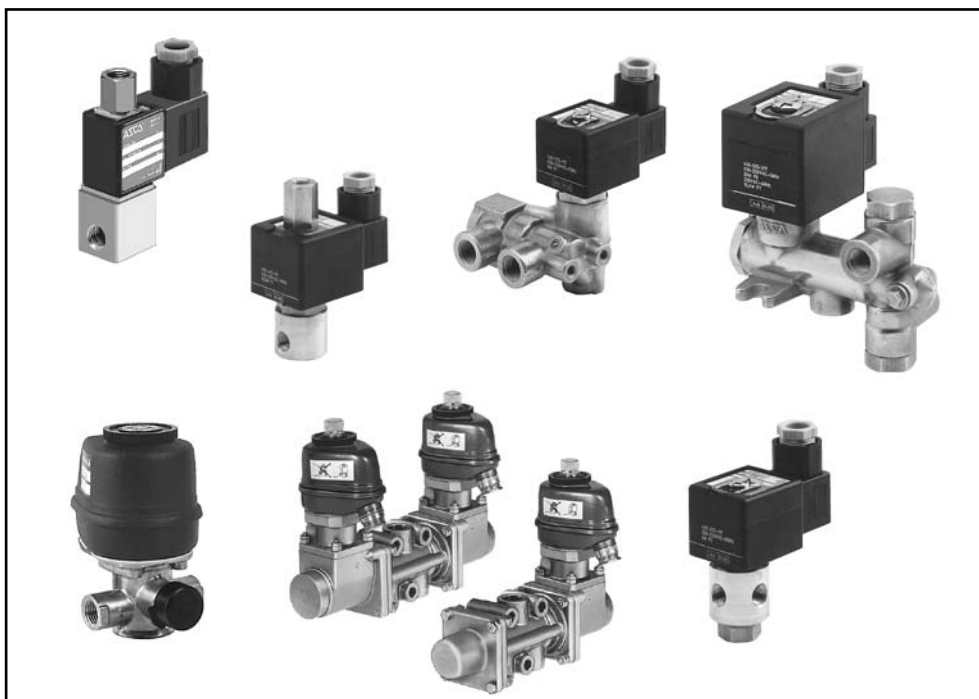

E

Fonction	Δ P		Température		Ø raccordement	Série	Page	
	mini. (bar)	maxi. (bar)	mini. (°C)	maxi. (°C)				
<b>CORPS LAITON</b>								
NF-NO-U	0	10	-20	+90	1/8	325	05-10	
NF-NO-U	0	20	-40	+90	1/8	314	05-15	
NF-NO-U	0	14	-20	+90	3 orifices dans le corps	1/8	320	05-20
NF-NO-U	0	38	-20	+90	1/8 .. 1/2	300	05-30	
NF-NO-U	0	25	-10	+80	1/4	121	05-75	
NF-NO	0,7	14	-20	+90	1/4 - 3/8	321	06-10	
NF	0	12	-10	+80	Monostable/bistable	3/8	231	06-15
<b>CORPS ACIER INOX</b>								
NF-NO-U	0	10	-20	+90	1/8	325	05-10	
NF-NO-U	0	14	-20	+90	3 orifices dans le corps	1/8	320	05-20
<b>CORPS BRONZE</b>								
NF	0	12	-10	+80	Monostable/bistable	1/2	231	06-15

